



N₂

**M-MNG-PRO SERIES
PSA MODULAR NITROGEN GENERATORS**

Manufacturing Forward





Mikropor began its journey in 1987 with a passion to create “Tomorrow’s Technology” and has become one of the leading manufacturers of atmospheric air filtration solutions and compressed air treatment systems for a variety of industries.

By closely following the latest developments in technology, Mikropor’s “Best in Class” products and solutions are appreciated by customers in more than 100 countries.

The company’s sustainable growth has been provided by its passion for innovation and commitment to quality, as well as its dedication to technology. Mikropor is an environmentally conscious company that values people, while developing products that extend the needs and expectations of customers.

With this mission, Mikropor continues to become one of the most recognized brands in the world by expanding its global penetration in the field of technological filtration and contributes to a healthier planet.

www.mikropor.com

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

Pressure Swing Adsorption (PSA) type Nitrogen Generation System that is used to separate and enrich nitrogen from oxygen employs CMS (Carbon Molecular Sieve) as adsorbent.



CMS adsorbs oxygen and water vapor molecules under a certain pressure while allowing nitrogen to pass through in the line.

M-MNG-PRO Series is a Modular Adsorber System

The Nitrogen Generator consists of couple of modules filled with CMS. Clean and dry air is directed to adsorber module beds where oxygen and water vapor are adsorbed faster than nitrogen in the pore structure of the CMS, resulting in increased nitrogen purity of the product gas stream to the desired level (95-99.999% as required by customer).

Applications

- Electronics industry
- Metal processing industry
- Chemical industry
- Industrial cleaning processes
- Plastics industry
- Charging nitrogen gas in tires
- Food production and storage processes

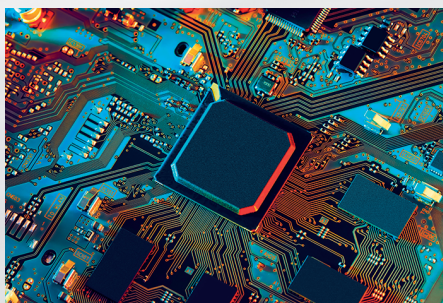

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

Standard

- Nitrogen Generation Modules
- Silencer
- Mini PLC
- Manometers
- Pressure Transmitter
- ECO Mode
- T Filter
- Piston Valves

Optional


- Dew Point Sensor
- Flowmeter
- Carbolescer®
- Oxygen Analyzer
- 3-Way By-Pass Valve
- HMI Color Touch Screen PLC
- Buffer Tank
- Oil Indicator
- Proportional Valve

Advantages

- Simple structure, compact design, full automated operation
- Replaces manifold usage (see pic. 1)
- PLC Controllers for monitoring and controlling the complete system (see pics. 2 & 3)
- PLC Screen for monitoring and visualizing the progress
- Rapid start-up and safety system
- Superior silencer design gives low noise levels during depressurization and purge
- Durable piston valves for long-life operation (see pic. 6)
- On-demand production with low costs
- High performance
 - *The purity and capacity of nitrogen gas is designed to meet customer requirements (Nitrogen Purity 95%~99.999% is available)
- Minimum maintenance cost
- Lower air-to-nitrogen (A/N) ratios and energy consumption
- Superior air distribution for the high-quality nitrogen gas production
- High-sensitive sensor technologies (see pic. 4)
- Effective Integrated Filtration (see pic. 5)
- Small footprint, lightweight, advanced compact design
- Corrosion protected Aluminium construction
- Can be floor, bench or wall mounted
- Quiet enough to be placed in any work environment
- Easy installation, easy maintenance



Replaces Manifold Usage - Pic. 1

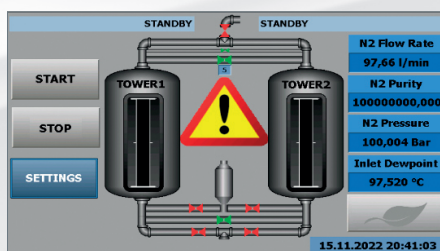

Touch Screen PLC - Pic. 2



Mini PLC - Pic. 3



Dew Point Sensor - Pic. 4



Air Filter - Pic. 5



Long Life Piston Valve - Pic. 6

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

Reference Conditions

Pressure Drop	Inlet Compressed Air Pressure	Outlet Nitrogen Pressure	Ambient Temperature	Inlet Air Dew Point
1.5 barg	7.5 barg	6 barg	25°C	≤3°C

Technical Specifications

Mikropor Models	Air Demand @ Following Purity Level (m ³ /h)									
	95%	97%	98%	99%	99.50%	99.90%	99.95%	99.99%	99.995%	99.999%
M-MNG-PRO-20	5.2	5.1	5.0	4.9	4.0	3.9	3.7	3.1	2.6	2.5
M-MNG-PRO-40	8.3	8.2	8.1	8.0	7.9	6.4	6.2	4.9	4.4	4.1
M-MNG-PRO-70	15.3	15.2	15.0	14.7	14.1	11.7	11.5	9.1	9.0	7.5
M-MNG-PRO-123	25.5	25.2	24.5	24.4	24.1	19.5	19.1	15.2	15.0	12.5
M-MNG-PRO-210	44.0	43.9	43.8	42.3	41.8	33.6	33.0	26.1	25.9	21.5
M-MNG-PRO-285	58.7	58.7	58.5	56.4	55.8	44.9	44.0	34.9	34.5	28.8
M-MNG-PRO-340	71.9	71.8	71.6	69.1	68.3	54.9	53.9	42.7	42.3	35.2
M-MNG-PRO-555	114.4	114.3	113.9	109.9	108.7	87.4	85.7	68.0	67.2	56.0
M-MNG-PRO-735	151.3	151.0	150.8	145.4	143.9	115.7	113.4	89.9	89.0	74.1
M-MNG-PRO-990	204.5	204.0	203.8	196.6	194.5	156.4	153.3	121.6	120.3	100.2
M-MNG-PRO-1130	234.3	234.0	233.4	225.2	222.8	179.1	175.6	139.2	137.7	114.7
M-MNG-PRO-1260	260.2	260.0	259.2	250.1	247.4	198.9	195.0	154.6	153.0	127.4
M-MNG-PRO-1650	340.5	340.0	339.3	327.3	323.8	260.3	255.3	202.4	200.2	166.8

Given flows are at 7 barg pressure with reference to 20°C and 1 bar atmospheric air suction as per ISO 7183 standard

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

Technical Specifications

Mikropor Models	Free Nitrogen Delivery @ Following Purity Level (m ³ /h)									
	95%	97%	98%	99%	99.50%	99.90%	99.95%	99.99%	99.995%	99.999%
M-MNG-PRO-20	3.0	2.7	2.3	2.0	1.4	1.2	1.1	0.5	0.4	0.3
M-MNG-PRO-40	4.9	4.4	3.8	3.2	2.9	1.9	1.8	0.8	0.7	0.5
M-MNG-PRO-70	9.0	8.1	6.9	5.9	5.0	3.6	3.3	1.5	1.4	0.9
M-MNG-PRO-123	15.0	13.4	11.6	9.8	8.6	5.9	5.5	2.6	2.4	1.5
M-MNG-PRO-210	25.9	23.1	19.9	16.9	14.9	10.2	9.4	4.4	4.2	2.6
M-MNG-PRO-285	34.5	30.9	26.6	22.6	19.9	13.6	12.6	5.9	5.6	3.5
M-MNG-PRO-340	42.3	37.8	32.5	27.6	24.4	16.7	15.4	7.2	6.8	4.3
M-MNG-PRO-555	67.3	60.2	51.8	44.0	38.8	26.5	24.5	11.5	10.8	6.8
M-MNG-PRO-735	89.0	79.6	68.5	58.2	51.4	35.1	32.4	15.2	14.4	9.0
M-MNG-PRO-990	120.3	107.6	92.6	78.6	69.5	47.4	43.8	20.6	19.4	12.2
M-MNG-PRO-1130	137.8	123.3	106.1	90.1	79.6	54.3	50.2	23.6	22.2	14.0
M-MNG-PRO-1260	153.0	136.9	117.8	100.0	88.4	60.3	55.7	26.2	24.7	15.5
M-MNG-PRO-1650	200.3	179.2	154.2	130.9	115.6	78.9	72.9	34.3	32.3	20.3

Given flows are at 7 barg pressure with reference to 20°C and 1 bar atmospheric air suction as per ISO 7183 standard

A/N Ratios for All M-MNG-PRO Models**

Purities	95%	97%	98%	99%	99.50%	99.90%	99.95%	99.99%	99.995%	99.999%
Air/N ₂ Ratio	1.7	1.9	2.2	2.5	2.8	3.3	3.5	5.9	6.2	8.2

** The Air/Nitrogen ratios according to the model and degree of purity are recommended as the value given above.

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

Technical Specifications

Mikropor Models	Recommended Buffer Tank Volume (l)									
	95%	97%	98%	99%	99.50%	99.90%	99.95%	99.99%	99.995%	99.999%
M-MNG-PRO-20	10.0	8.5	7.5	6.0	5.0	4.0	4.0	2.0	2.0	1.0
M-MNG-PRO-40	15.6	14.0	12.0	10.0	10.0	6.0	6.0	4.0	2.0	2.0
M-MNG-PRO-70	30.0	25.5	22.0	19.0	16.0	12.0	10.0	5.0	5.0	4.0
M-MNG-PRO-123	48.0	43.0	37.0	31.0	27.5	19.0	17.5	8.5	7.5	5.0
M-MNG-PRO-210	82.0	73.5	63.5	54.0	47.5	32.5	30.0	14.0	14.0	8.5
M-MNG-PRO-285	110.0	98.0	84.5	72.0	63.5	43.5	40.0	19.0	18.0	12.0
M-MNG-PRO-340	134.0	120.1	103.4	87.8	77.5	52.9	48.9	23.0	21.7	14.0
M-MNG-PRO-555	213.7	191.0	164.5	140.0	123.5	84.0	78.0	37.0	34.5	22.0
M-MNG-PRO-735	283.0	253.0	218.0	185.0	163.0	112.0	103.0	48.5	46.0	29.0
M-MNG-PRO-990	382.0	342.0	294.0	250.0	221.0	151.0	139.0	65.5	62.0	39.0
M-MNG-PRO-1130	438.0	392.0	337.0	286.0	253.0	172.0	160.0	75.0	71.0	44.5
M-MNG-PRO-1260	486.0	435.0	374.0	318.0	281.0	192.0	177.0	83.0	79.0	50.0
M-MNG-PRO-1650	636.0	568.0	490.0	416.0	368.0	251.0	232.0	109.0	103.0	65.0

Given flows are at 7 barg pressure with reference to 20°C and 1 bar atmospheric air suction as per ISO 7183 standard


Correction Factor

Inlet Pressure (barg)	F1	Ambient Temp. (°C)	F2
5	0.68	5	0.85
5.5	0.73	10	1.00
6	0.79	15	1.00
6.5	0.88	20	1.00
7	0.90	25	1.00
7.5	1.00	30	0.91
8	1.04	35	0.82
8.5	1.08	40	0.74
9	1.15	45	0.60
9.5	1.18	-	-
10	1.20	-	-


To determine the nitrogen generator model in the reference conditions divide the nitrogen flow rate to the factors mentioned in the correction table.

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS

AIR LINE DESIGN

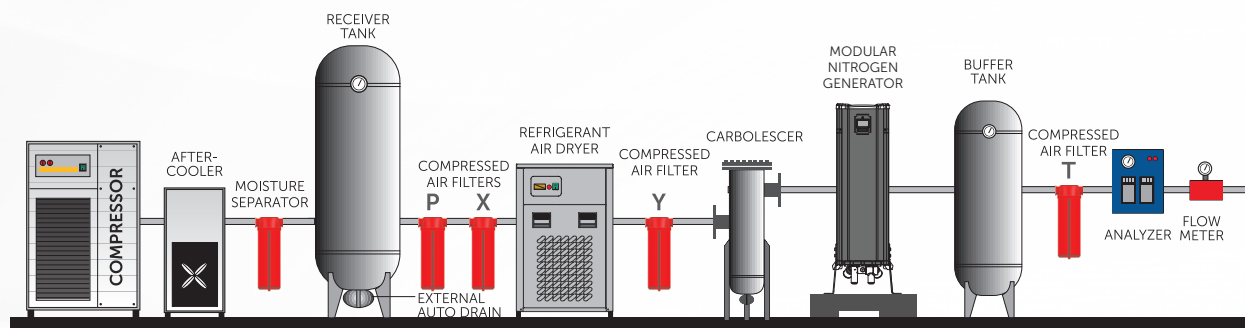

AIR LINE DESIGN

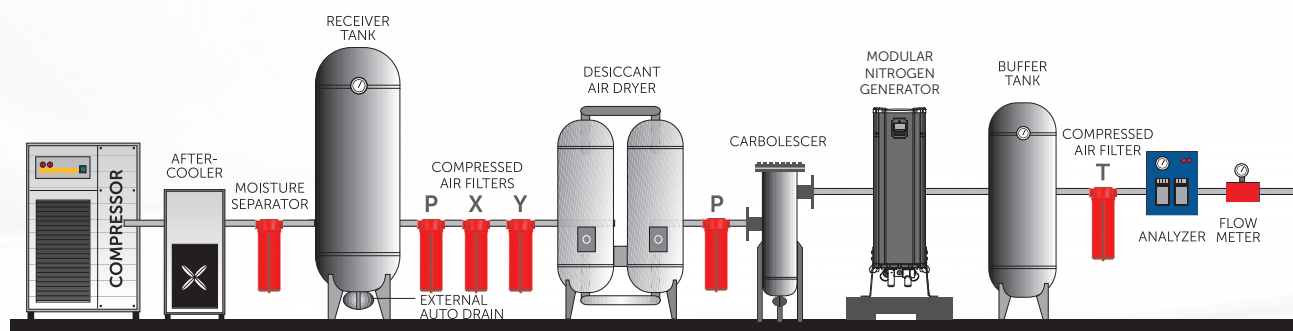

Mikropor reserves the right to change the design and/or dimensions and/or weight of his products at any time without any notice or liability.

M-MNG-PRO SERIES PSA MODULAR NITROGEN GENERATORS



Ahi Evran OSB Mah. Oğuz Cad. No: 5 Sincan, 06935, Ankara-Türkiye

☎ +90 312 267 0700 ✉ mikropor@mikropor.com

📷 🌐 📧 mikropor

www.mikropor.com